








# RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Lighting. Our assortment is crafted with highest quality detail in mind and each collection is clad in one of our signature finish options. Each item's surface is sealed which eliminates the need for polishing and ensures the lasting brilliance of your piece for year to come.

## PARTS:

ITEM	DIAGRAM	DESCRIPTION	QTY.
(A)		THREADED TUBE	1
(B)		CROSS BAR	1
(C)		MOUNTING SCREWS	2
(D)		CANOPY	1
(E)		CHAIN NUT	1
(F)		CHAIN	1
(H)		CONNECTOR	2

## IMPORTANT SAFETY ASSEMBLED:

\* These instruction are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

\*TURN OFF ELECTRICITY AT MAIN CIRCUIT BREAKER PANEL BEFORE BEGINNING INSTALLATION.\*

\*THIS DIRECT WIRE FIXTURE MUST BE INSTALLED BY A CERTIFIED AND LICENCED ELECTRICIAN.

Customer should not attempt to install.\*

## WARNINGS:

\*DUE TO WEIGHT OF THIS ITEM, THE MINIMUM RATING ON YOUR CEILING OUTLET BOX MUST BE 100 LBS. FOR FIXTURE. IT'S IMPERATIVE THAT YOU FOLLOW THE MANUFACTURERS INSTRUCTIONS FOR CEILING OUTLET BOX INSTALLATION.\*

\* IF ANY SPECIAL CONTROL DEVICES ARE USED WITH FIXTURE, FOLLOW THE INSTRUCTION CAREFULLY TO ASSURE FULL COMPLIANCE WITH N.E.C. REQUIREMENT. IF THERE ARE ANY QUESTIONS, CONTACT A LICENCED ELECTRICAL CONTRACTOR.\*


## ASSEMBLY:

1. Measure desire drop for fixture to hang from ceiling. Remove any unnecessary links from chain (F) using a chain-break tool (not included ).
2. Attach cross bar (B) with threaded tube (A) to ceiling outlet box using mounting screw (C). NOTE: DUE TO THE WEIGHT OF THIS ITEM, THE MINIMUM RATING ON YOUR CEILING OUTLET BOX MUST BE 100 LBS. FOR FIXTURES.
3. Slide canopy (D) up and hold flush against ceiling and screw the chain nut onto the threading tube to hang the fixture to ceiling.
4. Pull wire from ceiling outlet box make proper electrical connections described in step 5-7.
5. Attach ground wire from fixture to ground wire from outlet box. Fasten wire together and tightly wrap connection with electrical tape
6. Attach hot wire from fixture to hot wire from outlet box .and tightly wrap connection with electrical tape.
7. Attach neutral wire from fixture to neutral wire from outlet box and tightly wrap connection with electrical tape.

## CARE INSTRUCTION:


\*\*To clean, use a soft cloth only. DO NOT use any chemical or abrasive cleaner.\*\*

## Mounting Assembly Instruction

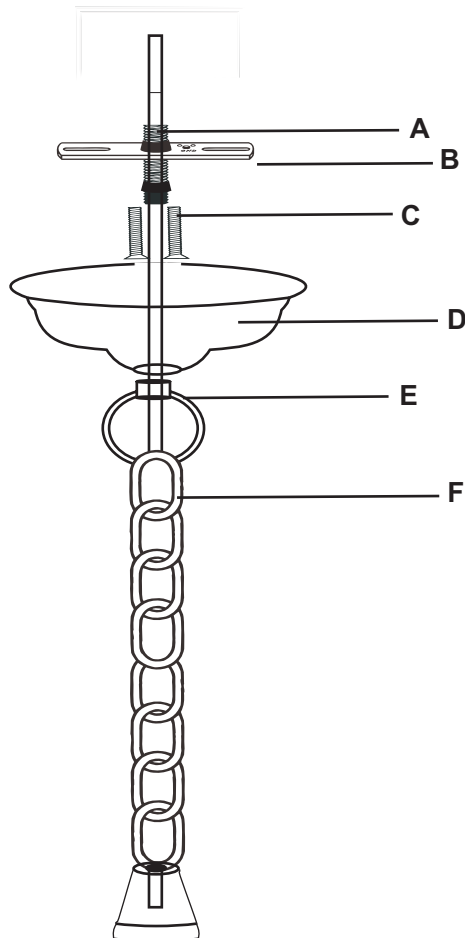

# RESTORATION HARDWARE

## WOOD CHANDELIER CARVED

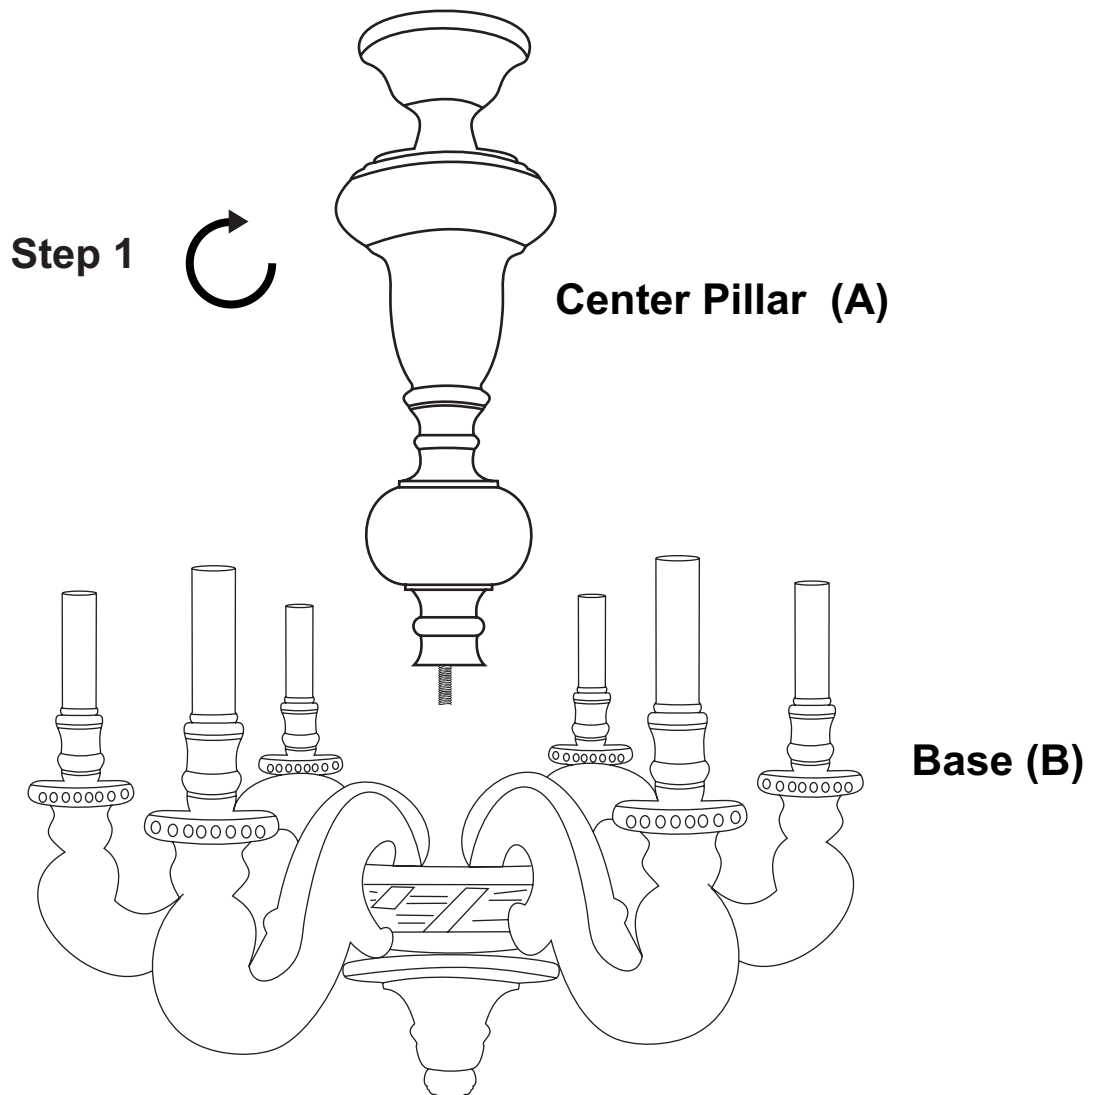

1. Place the base (B) horizontally on the ground with candle drips facing the top as per picture shown.
2. Hold the pillar (A) perpendicularly on the top of base (B).
3. Now pull the extra cable while simultaneously adjusting the chain ring and sliding the center pillar (A) on top of the base (B).
4. Once the nozzle of the center pillar (A) is inside the hole of base, rotate in clockwise direction to tighten and hold the base completely.
5. Chandelier is now ready for mounting assembly instruction.