

baby&child

RESTORATION HARDWARE


Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. The item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

PARTS ENCLOSED:

- (A) Mounting Plate (1)
- (B) Plastic Wire Connectors (2)
- (C) Ground Screw (1)
- (D) Mounting Screws (2)
- (E) Junction Box Mounting Screws (2)
- (F) Back Plate (1)
- (G) Nuts (2)
- (H) Tassel (1)
- (I) Bulbs (2) (included)

DAUPHINE CRYSTAL FLUSHMOUNT

Direct Wire Installation

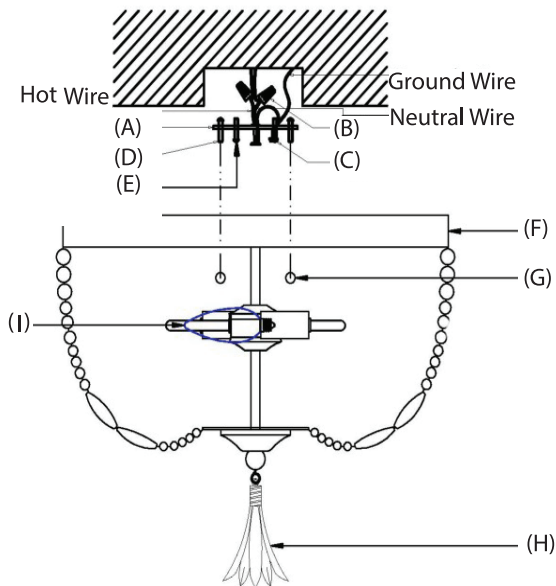

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN. This fixture has been rated for up to two (2) 40-Watt maximum Type B bulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing light bulbs. Do not touch bulbs when fixture is turned on or look directly at lit bulbs. Keep flammable materials away from lit bulbs.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the flushmount will be installed.
3. Connect the hot wire (black wire) to the hot junction box wire with a Plastic Wire Connector (B) and wrap the connection with electrical tape. Connect the neutral wire (white wire) to the neutral junction box wire with a Plastic Wire Connector (B) and wrap the connection with electrical tape.
4. Attach the ground wire (silver wire) from the fixture to the ground junction box wire in the outlet box, or wrap the ground wire around the Ground Screw (C).
5. Attach the Mounting Plate (A) to the outlet box using the Junction Box Mounting Screws (E) and tighten.
6. Attach the Back Plate (F) to the Mounting Plate (A) using the Mounting Screws (D).
7. Insert (2) 40-Watt Bulbs (I) into the sockets.
8. Tighten the flushmount to the Back Plate (F) using the screw with the Nut (G).
9. Restore power to the junction box and test fixture.
10. Installation is complete.

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.
JUST WIPE CLEAN WITH A SOFT CLOTH.