

baby&child

RESTORATION HARDWARE

Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. The item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

PARTS ENCLOSED:

- (A) PLASTICE WIRE CONNECTOR (3)
- (B) SCREW (2)

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to 60 Watt maximum Type A bulbs(25 Watt recommended)
To avoid the risk of fire, do not exceed the maximum wattage.

WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result.

**French Regency Crystal
Sconce Small**


To reduce the risk of fire, electrical shock, or personal injury, always turn off light and allow it to cool prior to replacing light bulb.
Do not touch bulb when fixture is turned on or look directly at lit bulb.
Keep flammable materials away from lit bulb.

Direct Wire Installation

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the light will be installed.
3. Insert the two screws provided into the electrical junction box (C). These will be the weight supporting screws for the fixture to hang from. DO NOT screw the screws all the way into the electric box. Leave enough screw protruding from the electric box to hang the light fixture onto.
4. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (A) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector (A) and wrap the connection with electrical tape.
5. Attach the ground wire from the fixture to the ground junction box wire from the electrical box (usually green or bare wire) with a plastic wire connector (A). If there is not a ground wire coming out of the junction box, then attach the ground wire from the fixture to the green ground screw in the electrical junction box (C).
6. Tuck the wires into the electric junction box (C) and then hang the fixture on the protruding screws by the two mounting holes on the back of the fixture.
7. Insert 2 Type A 25W - 60W bulbs into the light bulb sockets. (bulbs not included).
8. Restore power to the junction box and test fixture.
9. Installation is complete.

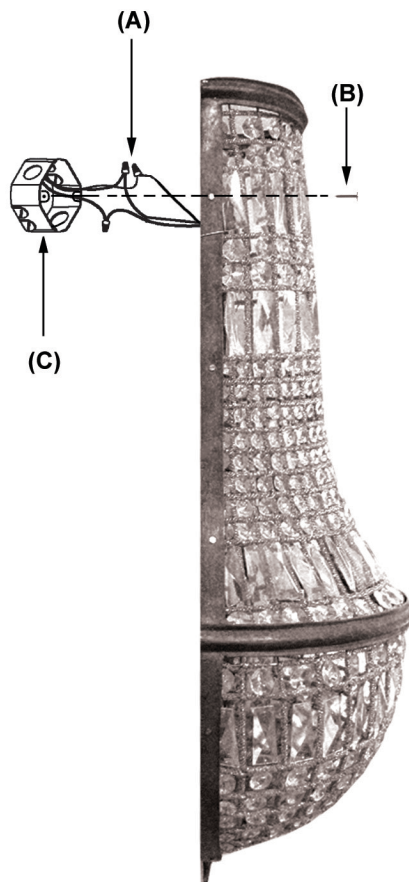

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.

JUST WIPE CLEAN WITH SOFT CLOTH.