

baby&child

RESTORATION HARDWARE


Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. The item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

PARTS ENCLOSED:

- | | |
|--------------------------------|-----------------------------|
| (A) Mounting plate (1) | (I) Metal pole bottom (1) |
| (B) Plastic wire connector (2) | (J) Sleeves (9) |
| (C) Ground screw (1) | (K) Bulb (9) (Not Included) |
| (D) Mounting screw (2) | (L) Crystal beads (12) |
| (E) Canopy (1) | (M) Crystal beads (24) |
| (F) Ring (1) | (N) Crystal beads (24) |
| (G) Metal post (1) | |
| (H) Metal pole screw | |

DAUPHINE CRYSTAL CHANDELIER

Direct Wire Installation

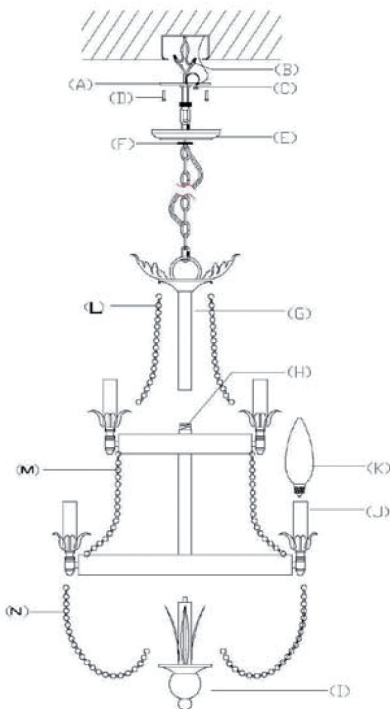

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN. This fixture has been rated for up to nine (9) 40-watt maximum TYPE E12 B-10 bulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your chandelier is fully assembled.

To reduce the risk of fire, electrical shock, or personal injury, always turn off chandelier and allow it to cool prior to replacing light bulb.

Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE

TO ASSEMBLE:

- 1: Carefully remove all parts from the box and remove all plastic covering.
- 2: Turn OFF power to the junction box where the chandelier will be installed.
- 3: Screw metal post (G), and (I) on to metal pole screw (H).
- 4: Connect the hot wire to the hot junction box wire with a plastic wire connector (B) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire with a plastic wire connector (B) and wrap the connection with electrical tape.
- 5: Attach the ground wire from the fixture to the ground junction box wire from the outlet the box, or wrap the ground wire around the green ground screw (C).
- 6: Attach Mounting plate (A) to the outlet box using the Mounting screws (D) and tighten.
- 7: Attach the Canopy (E) to the Mounting plate (A) using the Ring (F) and tighten.
- 8: Put the sleeve (J) on the socket and insert (9) 40-watt bulbs (Not Included).
- 9: Attach all crystal beads on the chandelier as shown in the drawing.
- 10: Restore power to the junction box and test fixture.
- 11: Installation is complete.

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.

JUST WIPE CLEAN WITH SOFT CLOTH.