

baby&child

RESTORATION HARDWARE


Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. The item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

PARTS ENCLOSED:

- (A) Mounting plate (1)
- (B) Plastic wire connector (2)
- (C) Ground screw (1)
- (D) Mounting screw (2)
- (E) Screw (2)
- (F) Screw Nut (2)
- (G) Large crystal drops (3)
- (H) Wall sconce
- (I) Small crystal drops (17)
- (J) Sleeves (3) (Included)
- (K) Bulbs (3) (Not Included)

PALAIS SCONCE

Direct Wire Installation

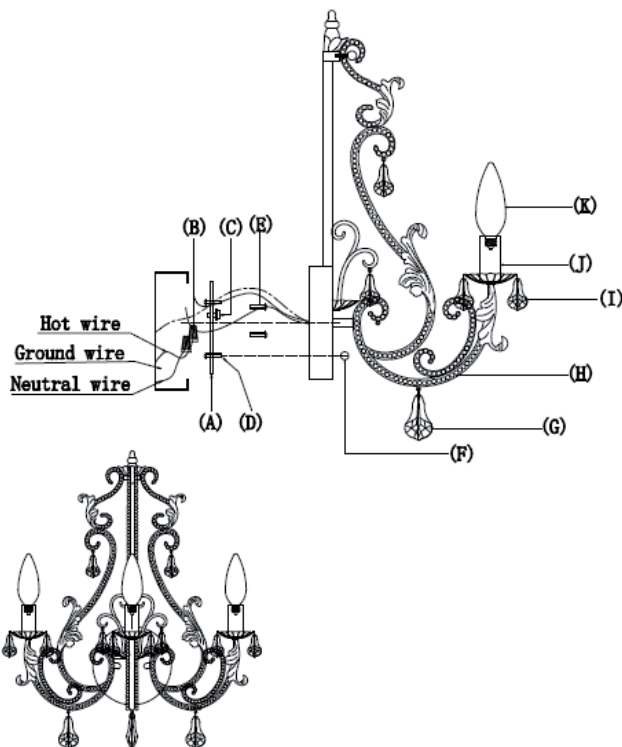

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN. This fixture has been rated for up to three (3) 40-watt maximum TYPE E12 candelabra bulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fi xture and allow it to cool prior to replacing the light bulb. Do not touch the bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the wall sconce will be installed.
3. Connect (A) mounting plate to the hot junction box wire with (E) screws.
4. Use the (B) plastic wire connector to connect the wire and wrap the ground wire (silver wire is ground wire,black wire is hot wire,white wire is neutral wire) around the screws (C).
5. Attach mounting plate (A) to the outlet box using the mounting screws (D) and tighten.
6. Connect the wall sconce base (H) to the Mounting plate (A) with screws Nut (F).
7. Put the sleeves (J) on the sockets and insert three (3) 40-watt bulbs (K)
8. Attach small crystal drops (I) and large crystal drops (G) to the chandelier
9. Restore power to the junction box and test fixture.
10. Installation is complete

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.
JUST WIPE CLEAN WITH A SOFT CLOTH.