

## MANOR COURT CRYSTAL 6-ARM CHANDELIER - ASSEMBLY INSTRUCTIONS

Thank you for selecting RH Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. Each item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

### PARTS ENCLOSED:

- (A) Plastic wire connectors (2)
- (B) Mounting plate (1)
- (C) Mounting screws (2)
- (D) Canopy (1)
- (E) Ring (1)
- (F) LED bulbs (6)
- (G) Sleeves (6)
- (H) Sockets (6)
- (I) Green ground screw (1)

### IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (6) 2w max Type B LED bulbs (MODEL NO.: C32-2, included) or (6) 40w max Type B incandescent bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

### WARNINGS:


All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug fixture and allow it to cool prior to replacing the lightbulbs. Do not touch bulb when fixture is turned on or look directly at lit bulbs. Keep flammable materials away from lit bulbs.

### Direct-Wire Installation

**THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.  
KEEP ALL PARTS OUT OF REACH OF CHILDREN.**

### ASSEMBLY & INSTALLATION:

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn OFF power to the junction box where the fixture will be installed.
3. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (A) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector (A) and wrap the connection with electrical tape.
4. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire). Or wrap the ground wire around the green ground screw (I).
5. Attach mounting plate (B) to the outlet box using the mounting screws (C) and tighten.
6. Attach the canopy (D) to the mounting plate (B) using the ring (E) and tighten.
7. Put the sleeves (G) on the sockets (H) and insert (6) LED bulbs (F) into the sockets.
8. Restore power to the junction box and test fixture.
9. Installation is complete.

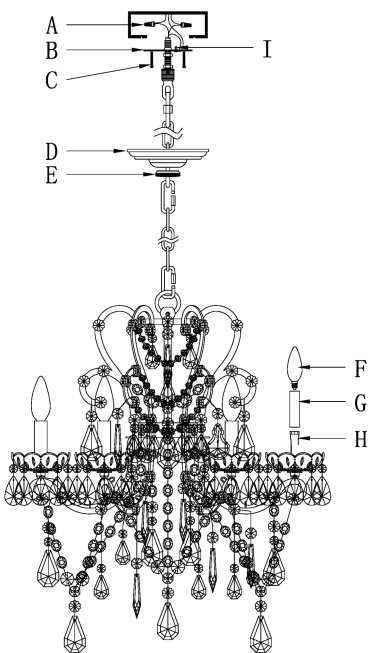

**REMARK: There are extra crystals for replacement in the packaging.**

### CARE INSTRUCTIONS:

Do not use polishes or cleaners, as they will damage the finish. Wipe clean with a soft, dry cloth.