

baby&child


RESTORATION HARDWARE

Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. The item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

PARTS ENCLOSED:

- | | |
|--------------------|----------------------------|
| (A) Socket ring | (a) Wire connector (2) |
| (B) Metal shade | (b) Mounting screw (3) |
| (C) Socket | (c) Green ground screw (1) |
| (D) Back plate | (d) Backplate screw (4) |
| (E) Mounting plate | |

DOUBLE SWING-ARM TIPTON SCNCE

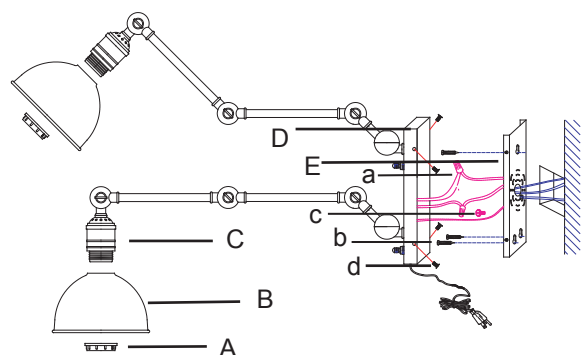

IMPORTANT SAFETY INSTRUCTIONS:

For safety purposes, this lamp is equipped with a polarized plug (one prong is wider than the other). If the plug does not fit securely into your outlet, do not force it - contact a professional electrician. Use the plug with an extension cord only if it can be fully inserted into the cord's socket. Never alter the plug in any way.

DIRECT WIRE FIXTURES: WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN

This fixture has been rated for up to (2) Type A 60 W standard bulb.
To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled.

To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulb.

Do not touch bulb when fixture is turned on or look directly at lit bulb.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE

PLUG-IN ASSEMBLY:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Attach the mounting plate (E) to the wall using the mounting plate screws provided (b).
3. Attach the backplate (D) to the mounting plate (E) using the enclosed backplate screw (d).
4. Secure Socket ring (A) into the Metal shade (B).
5. Insert the bulb (not included) into threaded socket (C).
6. Plug into proper electrical outlet and test fixture.

DIRECT WIRE ASSEMBLY:

1. Carefully remove all parts from the box.
2. Shut off power to the junction box where the sconce will be installed.
3. Guide the wiring from the outlet box through center hole in the mounting plate (E).
4. Attach the ground wire (Usually green or bare wire) from the fixture to the ground junction box wire from the outlet box (Usually green or bare wire) with a wire connector (a). Wrap the connection with electrical tape or screw the green ground wire screw (c) into the mounting plate (E) and wrap the fixture's bare ground wire around the green ground wire screw (c).
5. Connect the hot wire to the hot junction box wire (usually black) with a wire connector (a) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white) with a wire connector (a) and wrap the connection with electrical tape.
6. Attach the mounting plate (E) to the outlet box using the mounting plate screws (b).
7. Attach the backplate (D) to the mounting plate (E) using the enclosed backplate screw (d).
8. Insert the bulb (not included) into threaded socket (C).
9. Restore power to the junction box and test fixture.
10. Assembly is complete.

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.
JUST WIPE CLEAN WITH SOFT CLOTH