








baby&child

RESTORATION HARDWARE

Thank you for purchasing Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. The item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

PARTS:

ITEM	DIAGRAM	DESCRIPTION	QTY.
(A)		OUTLET BOX	1
(B)		THREADED TUBE	2
(C)		MOUNTING PLATE	1
(D)		MOUNTING SCREW	2
(E)		CANOPY	1
(F)		CHAIN NUT	1
(G)		CHAIN	1

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for (1) up to 75-watt maximum TYPE A bulb.

To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled.

To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb.

Do not touch bulb when fixture is turned on or look directly at lit bulb.

Keep flammable materials away from lit bulb.


THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE

PLEASE NOTE:

Due to the weight of this item, the minimum rating for your ceiling outlet box must be **100 LBS.**

ROPE ORB PENDANT

Direct Wire Installation

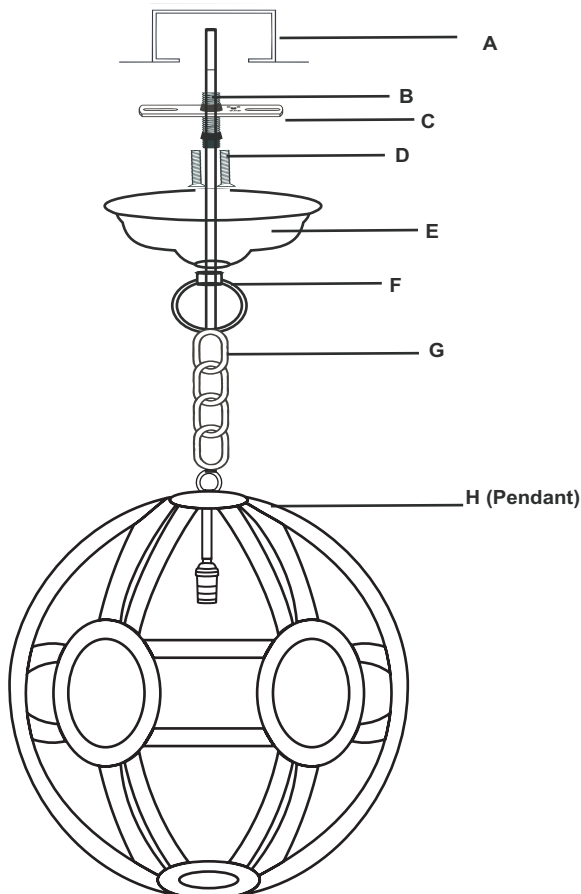

ASSEMBLY INSTRUCTIONS:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the fixture will be installed.
3. Measure desired drop of fixture from ceiling, and remove any unnecessary links from chain (J) if desired.
4. Insert threaded tube (B) halfway into mounting plate (C) and attach mounting Plate (C) to ceiling outlet box using mounting screws (D)
5. Pull wire from ceiling outlet box, and attach ground wire (usually green or bare wire) from ceiling box to ground wire on fixture with a plastic wire connector. Wrap this connection with electrical tape.
6. Attach hot wire from ceiling box (usually black or smooth) with hot wire on fixture with a plastic wire connector, and wrap this connection with electrical tape.
7. Attach neutral wire from ceiling box (usually white or ribbed) with neutral wire on fixture with a plastic wire connector, and wrap this connection with electrical tape.
8. Slide canopy (E) up and hold flush against ceiling. Screw the chain nut (F) onto the threaded tube (B) to hang the fixture.
9. Insert TYPE A bulb.
10. Restore power to the junction box and test fixture.
11. Installation is complete.

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.
Just wipe clean with soft cloth.