

# baby&child

RESTORATION HARDWARE

Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. Each item's surface is sealed which eliminates the need for polishing and ensures a lasting finish for years to come.

## PARTS ENCLOSED:

(A) Mounting Plate (1)

(B) Canopy (1)

(C) Socket (1)

## HARDWARE:

(D) Mounting Screw (2)

(E) PLASTIC ANCHORS (2)

## TO INSTALL YOU WILL NEED:

Phillips Screw Driver

Flat Screw Driver

Drill

## IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (1) 40W max type A incandescent bulb. To avoid the risk of fire, do not exceed the recommended wattage.

## WARNINGS:


All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled.

To reduce the risk of fire, electrical shock or personal injury always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.

## FACTORY CAGE PENDANT

### Direct Wire Installation

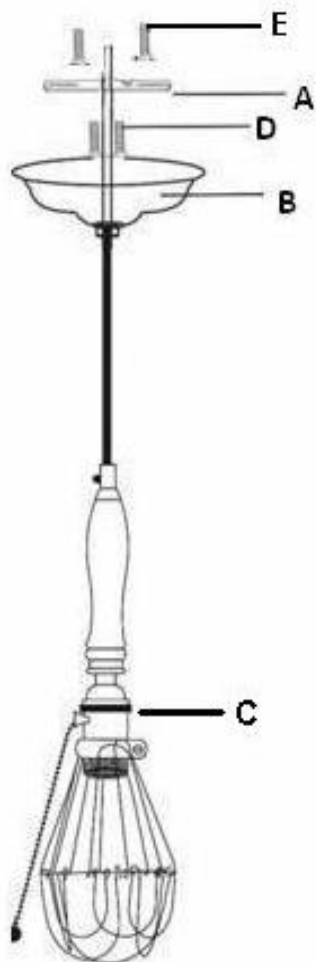

## ASSEMBLY INSTRUCTIONS:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box, where the fixture will be installed.
3. Attach mounting plate (A) to ceiling outlet box using mounting screws (D) and plastic anchors (E).
4. Pull wire from ceiling outlet box, and attach ground wire (usually green or bare wire) from ceiling box to ground wire on fixture with a plastic wire connector. Wrap this connection with electrical tape.
5. Attach hot wire from ceiling box (usually black or smooth) with hot wire on fixture with a plastic wire connector, and wrap this connection with electrical tape.
6. Attach neutral wire from ceiling box (usually white or ribbed) with neutral wire on fixture with a plastic wire connector, and wrap this connection with electrical tape.
7. Slide Canopy (B) up and screw it with the help of cord grip screw at the end top of canopy.
8. Insert bulb (not included) into socket (C).
9. Restore power to the junction box and test fixture.
10. Installation is complete.

## CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.  
JUST WIPE CLEAN WITH SOFT CLOTH.