


Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. The item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

## PARTS ENCLOSED:

- (A) Mounting Plate (1)
- (J) Socket Washer (1)
- (B) Plastic Wire Connectors (2) (K)Bulb (1) (not included)
- (C) Ground Screw (1)
- (D) Mounting Screws (2)
- (E) Junction Box Mounting Screws (2)
- (F) Nuts (2)
- (G) Socket (1)
- (H) Wall Sconce Base
- (I) Shade (1) (included)

# NATHALIE CRYSTAL SCONCE

# **Direct Wire Installation**

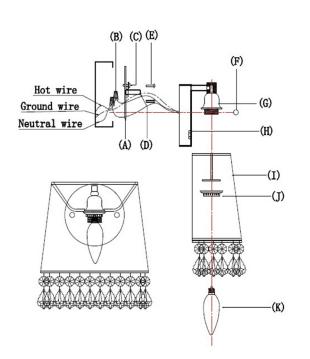

# **IMPORTANT SAFETY INSTRUCTIONS:**

#### WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to one (1) 60-Watt maximum Type B bulb. To avoid the risk of fire, do not exceed the recommended wattage.

### **WARNINGS:**

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch the bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.

## TO ASSEMBLE:

- 1. Carefully remove all parts from the box and remove all plastic
- 2. Turn OFF power to the junction box where the wall sconce will be installed.
- 3. Connect Mounting Plate (A) to the hot junction box wire with
- 4. Use the Plastic Wire Connector (B) to connect the wire and wrap the ground wire (silver is ground wire, white is neutral wire, black is hot wire) around the Ground Screws (C).
- 5. Attach Mounting Plate (A) to the outlet box using the Mounting Screws (D) and tighten.
- 6. Connect the Wall Sconce Base (H) to the Mounting Plate (A) with Nuts
- 7. Tighten the Shade (I) on the Socket (G) with the Socket Washer (J).
- 8. Insert the Bulb (K) into the Socket (G).
- 9. Restore power to the junction box and test the fixture.
- 10. Installation is complete.

## **CARE INSTRUCTIONS:**

Do not use polishes or cleaners on your lamp. JUST WIPE CLEAN WITH A SOFT CLOTH.