

baby&child

RESTORATION HARDWARE


Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. The item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

PARTS ENCLOSED:

- | | |
|--------------------------------------|----------------------|
| (A) Mounting Plate (1) | (J) Socket (1) |
| (B) Plastic Wire Connectors (2) | (K) Wall Sconce Base |
| (C) Ground Screw (1) | |
| (D) Mounting Screws (2) | |
| (E) Junction Box Mounting Screws (2) | |
| (F) Nuts (2) | |
| (G) Finial (1) | |
| (H) Shade (1) (included) | |
| (I) 25-Watt Bulb (1) (included) | |

CALLA SCONCE

Direct Wire Installation

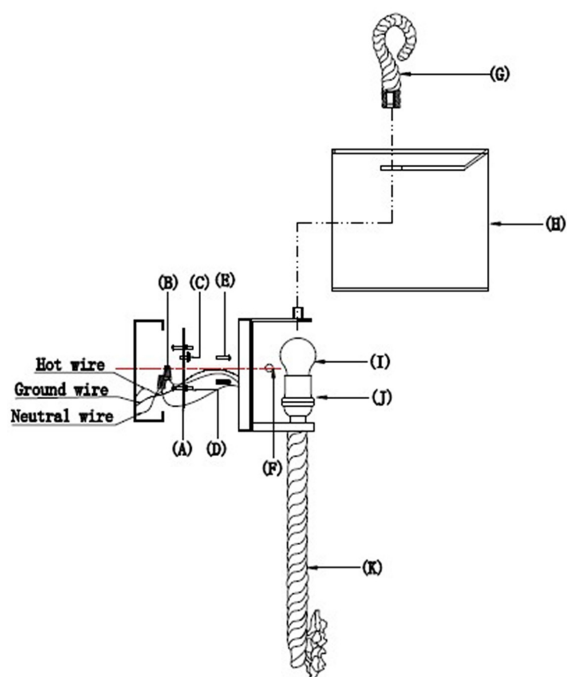

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to one (1) 40-Watt maximum mini Type A bulb. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the light bulb. Do not touch the bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the wall sconce will be installed.
3. Connect Mounting Plate (A) to the hot junction box wire with Junction Box Mounting Screw (E).
4. Use the Plastic Wire Connector (B) to connect the wire and wrap the ground wire (silver wire) around the Ground Screw (C).
5. Attach Mounting Plate (A) to the outlet box using the Mounting Screws (D) and tighten.
6. Connect the Wall Sconce Base (K) to the Mounting Plate (A) with Nuts (F).
7. Insert Bulb (I) into the Socket (J).
8. Put on the Shade (H) and tighten it with Finial (G).
9. Restore power to the junction box and test fixture.
10. Installation is complete.

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.
JUST WIPE CLEAN WITH A SOFT CLOTH.