

baby&child

RESTORATION HARDWARE


Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. Each item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

PARTS ENCLOSED:

- (A) Plastic wire connector (3)
- (B) Mounting plate (1)
- (C) Mounting screw (2)
- (D) Canopy (1)
- (E) Canopy screw (2)
- (F) Green ground screw (1)
- (G) 100W Type A Bulb (1, included)
- (H) Canopy screw nut (2)
- (I) Steel wire (3)
- (J) Canopy knob (2)

CERES CRYSTAL SMALL PENDANT

Direct Wire Installation

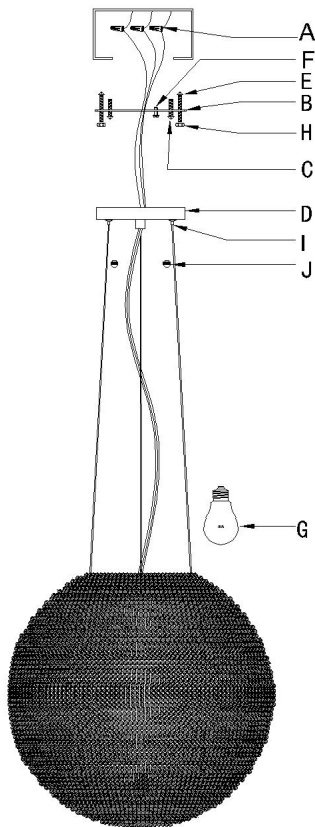

IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (1) 100-watt maximum TYPE A bulb (included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off the lamp and allow it to cool prior to replacing the light bulb. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.

ASSEMBLY & INSTALLATION:

1. Carefully remove all parts from the box and remove plastic covering.
2. Turn OFF power to the junction box where the lamp will be installed.
3. Insert (1) 100W max Type A bulb (G) into the socket.
4. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (A) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector (A) and wrap the connection with electrical tape.
5. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire). Or wrap the ground wire around the green ground screw (F).
6. Attach Mounting plate (B) to the outlet box using the mounting screws (C) and tighten.
7. Attach the Canopy (D) to the Mounting plate (B) using the canopy screw (E) and canopy screw nut (H) to secure.
8. Turn the 2pcs canopy knobs (J) onto the canopy screw thread to fix the canopy in place.
9. Hang the whole lamp and adjust & make sure the 3 steel wires (I) balanced.
10. Restore power to the junction box and test fixture.
11. Installation is complete.

CARE INSTRUCTIONS:

Wipe clean with soft cloth.
Do not use polishes or cleaners, as they will damage the finish.