

baby&child

RESTORATION HARDWARE

Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. The item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

PARTS ENCLOSED:

- (A) Mounting plate (1)
- (B) Canopy (1)
- (C) Chain (1)
- (D) Chain link (2)
- (E) Socket (6)

HARDWARE INCLUDED:

- (a) Green ground screw (1)
- (b) Plastic wire connector (3)
- (c) Mounting screw (2)
- (d) Hoop (1)
- (e) Metal loop (1)
- (f) Ring (1)
- (g) Bulb (6) (included)
- (h) Green ground wire (1)

IMPORTANT SAFETY INSTRUCTIONS:

This fixture must be installed by a licensed electrician.

This fixture has been rated for up to (6) 18-watt maximum G9 halogen bulbs.

To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your pendant is fully assembled.


To reduce the risk of fire, electrical shock, or personal injury, always turn off pendant and allow it to cool prior to replacing light bulb.

Do not touch bulb when fixture is turned on or look directly at lit bulb.

Keep flammable materials away from lit bulb.

ARORA CRYSTAL SMALL PENDANT

Direct Wire Installation

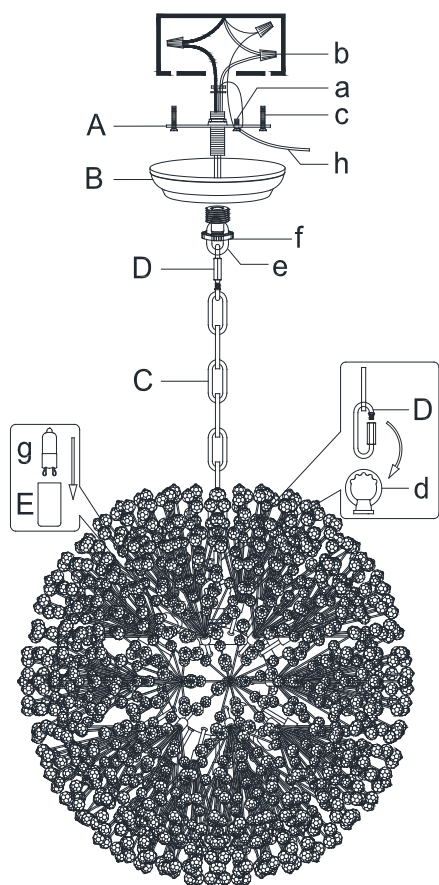

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the lamp will be installed.
3. Determine the length of the chain (C) and cut the cord. Weave the cord through the chain (C) and make sure the chain links (D) are connected to the hoop (d) and metal loop (e).
4. Insert the cord through the central hole of canopy (B). Connect the black hot wire on the fixture (labeled with an "L") to the hot junction box wire (usually black or smooth) with a plastic wire connector (b) and wrap the connection with electrical tape. Connect the white neutral wire on the light fixture (labeled with an "N") to the neutral junction box wire (usually white or ribbed) with a plastic wire connector (b) and wrap the connection with electrical tape.
5. Attach the green ground wire (h), which attached to green ground screw (a), to the green wire from fixture cord and the ground wire from outlet box (usually green or bare wire) with a plastic wire connector (b). Or attach the green ground wire (h) to the green wire from fixture cord only if junction box has no ground wire. **MAKE SURE THE JUNCTION BOX IS PROPERLY GROUNDED!**
6. Attach mounting plate (A) to the outlet box using the mounting screws (c) and tighten.
7. Attach canopy (B) to the mounting plate (A). Screw the metal loop (e) onto the threaded tube of mounting plate (A), and use the ring (f) to tighten the canopy (B).
8. Insert bulbs (g) (included) into the sockets (E). **Do not touch bulbs with bare fingers. Use a cotton cloth or tissue to grasp the bulb.**
9. Restore power to the junction box and test lamp fixture.
10. Installation is complete.

CARE INSTRUCTIONS:

Do not use polishes or cleaners on your fixture.

JUST WIPE CLEAN WITH SOFT CLOTH.