

# RH BABY&CHILD

Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. Each item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

## PARTS ENCLOSED:

- (A) Plastic wire connector (3)
- (B) Mounting plate (1)
- (C) Mounting screw with 25mm L (2)
- (D) Green ground screw (1)
- (E) Canopy (1)
- (F) Canopy screw with 30mm L (2)
- (G) Nut (2)
- (H) Ball screw (2)
- (I) Solid tooth tube (1)
- (J) Extension rod (1, 18" long)
- (K) Extension rod (1, 12" long)
- (L) Extension rod (1, 12" long)
- (M) Bottom rod (1, 6" long)
- (N) Solid connecting part (1)
- (O) 15W T25 clear bulb (6, included)

## IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (6) 15W maximum T25 clear bulbs (included). To avoid the risk of fire, do not exceed the recommended wattage.


## WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulb. Do not touch the bulb when fixture is turned on. Keep flammable materials away from lit bulb.

**THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.**

## NOVA PENDANT

### Direct Wire Installation

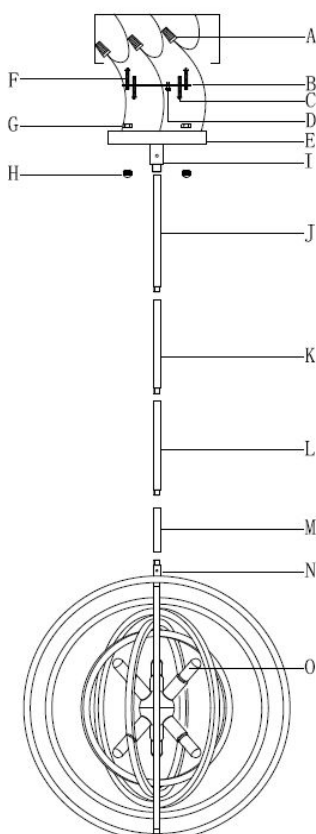

## ASSEMBLY & INSTALLATION:

1. Carefully remove all parts from the box and remove plastic covering.
2. Turn OFF power to the junction box where the lamp will be installed.
3. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (A) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector (A) and wrap the connection with electrical tape.
4. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire). Or wrap the ground wire around the green ground screw (D).
5. Attach Mounting plate (B) to the outlet box using the mounting screws (C) also make sure tighten.
6. Attach the canopy (E) to the Mounting plate (B) using the canopy screw (F), nut (G) and ball screw (H) to secure.
7. Connect the extension rod (J) onto the solid tooth tube (I), then connect extension rod (K) onto (J), (L) to (K), (M) to (L), (M) to solid connecting part (N).
8. Insert the bulb (O) into the socket and secure tightly.
9. Restore power to the junction box and test fixture.
10. Installation is complete.

## CARE INSTRUCTIONS:

Wipe clean with soft cloth.  
Do not use polishes or cleaners, as they will damage the finish.