

# RH BABY & CHILD


Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. Each item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

## PARTS ENCLOSED:

- (A) Plastic wire connector (3)
- (B) Mounting screw (2)
- (C) Green ground screw (1)
- (D) Canopy (1)
- (E) Wall anchors (2)
- (F) Mounting plate (1)
- (G) Flat head wall screws (2)
- (H) Canopy screw (2)

## WYATT PENDANT

### Direct Wire Installation

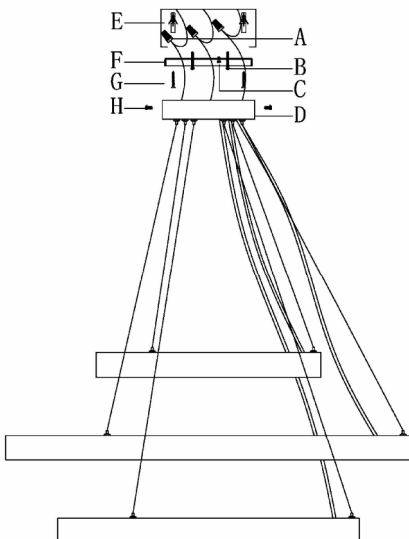

## IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture is designed for use with LED strips. To avoid the risk of fire, do not change the lamp personally for use with any other LED strips.

## WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your lamp is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light strip. Do not touch the LED strip when fixture is turned on. Keep flammable materials away from lit strip.

**THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.**

## ASSEMBLY & INSTALLATION:

1. Carefully remove all parts from the box and remove plastic covering.
2. Turn OFF power to the junction box where the lamp will be installed.
3. Disassemble the mounting plate (F), then drill 2 holes in the ceiling that align with the 2 slot holes on the mounting plate (F), and insert wall anchors (E).
4. Use the 2 flat head wall screws (G) get through the 2 slot holes on the mounting plate (F) to screw into the wall anchors (E).
5. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (A) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector (A) and wrap the connection with electrical tape.
6. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire). Or wrap the ground wire around the green ground screw (C).
7. Attach Mounting plate (F) to the outlet box using the mounting screws (B) also make sure tighten.
8. Attach the canopy (D) to the Mounting plate (F) using the canopy screw (H) to secure.
9. Hang the whole lamp and adjust & make sure all the steel wires balanced.
10. Restore power to the junction box and test fixture.
11. Installation is complete.

## CARE INSTRUCTIONS:

Wipe clean with soft cloth.  
Do not use polishes or cleaners, as they will damage the finish.