

## MILO PENDANT – ASSEMBLY INSTRUCTIONS

Thank you for selecting RH Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. Each item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

### PARTS ENCLOSED:

- (A) Plastic wire connectors (3)
- (B) Mounting plate (1)
- (C) Mounting screws (2)
- (D) Green ground screw (1)
- (E) Canopy (1)
- (F) Canopy screws (2)
- (G) Extension rod (1, 18" long)
- (H) Sockets (10)
- (I) LED bulbs (10, included)
- (J) Allen key (1)
- (K) M4 screws (5)
- (L) Extension rods (2, 12" long)
- (M) Extension rod (1, 6" long)
- (N) Wire housing (1)

### IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (10) 2w max Type T LED bulbs (MODEL NO.: T8-2, included) or (10) 25w max Type T incandescent bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

### WARNINGS:


All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug fixture and allow it to cool prior to replacing lightbulb. Do not touch the bulb when fixture is turned on. Keep flammable materials away from lit bulb.

### Direct-Wire Installation

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

### ASSEMBLY & INSTALLATION:

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn OFF power to the junction box where the fixture will be installed.
3. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (A) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector (A) and wrap the connection with electrical tape.
4. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire). Or wrap the ground wire around the green ground screw (D).
5. Attach mounting plate (B) to the outlet box using the mounting screws (C) and tighten.
6. Attach the canopy (E) to the mounting plate (B) using the canopy screw (F) to secure.
7. Screw the extension rod (G) onto the thread of canopy (E), connect the extension rod (L) to (G), (L) to (L), (M) to (L), then screw extension rod (M) onto the wire housing (N). Tighten the end of each rod using Allen key (J) and M4 screws (K) to make sure all rods are properly secured.
8. Insert the LED bulbs (I) into the sockets (H) and secure tightly.
9. Restore power to the junction box and test fixture.
10. Installation is complete.

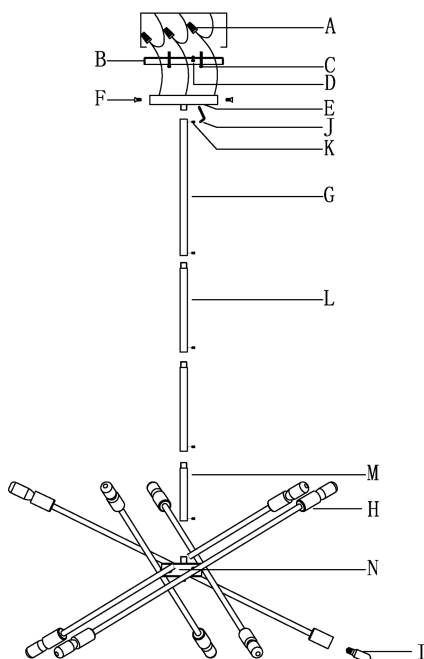

### CARE INSTRUCTIONS:

Do not use polishes or cleaners, as they will damage the finish. Wipe clean with a soft, dry cloth.