RH


FELIX PENDANT – ASSEMBLY INSTRUCTIONS

Thank you for selecting RH Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. Each item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

PARTS ENCLOSED:

- (A) Plastic wire connectors (3)
- (B) Mounting plate (1)
- (C) Mounting screws (2)
- (D) Green ground screw (1)
- (E) Canopy (1)
- (F) Canopy screws (3)
- (G) LED bulbs (6, included)

Direct-Wire Installation

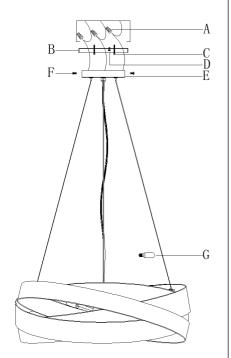

IMPORTANT SAFETY INSTRUCTIONS: WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (6) 2w max Type T LED bulbs (MODEL NO. T8-2, included) or (6) 40w max Type T incandescent bulbs (not included). To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug fixture and allow it to cool prior to replacing lightbulbs. Do not touch the bulbs when fixture is turned on. Keep flammable materials away from lit bulbs.

THIS PRODUCT IS NOT A TOY AND HAS NO PLAY VALUE.

NOTE: This equipment has been tested and found to comply with the limits for Class B digital devices, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on. The user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.

• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

• Consult the dealer or an experienced radio/TV technician for help.

ASSEMBLY & INSTALLATION:

- 1. Carefully remove all parts from the box and remove plastic coverings.
- 2. Turn OFF power to the junction box where the fixture will be installed.
- 3. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (A) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector (A) and wrap the connection with electrical tape.
- 4. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire). Or wrap the ground wire around the green ground screw (D).
- 5. Attach mounting plate (B) to the outlet box using the mounting screws (C) and tighten.
- 6. Attach the canopy (E) to the mounting plate (B) using the canopy screw (F) to secure.
- 7. Insert the LED bulbs (G) into the sockets and secure tightly.
- 8. Hang the whole fixture and adjust to make sure all the steel wires are balanced.
- 9. Restore power to the junction box and test fixture.
- 10. Installation is complete.

CARE INSTRUCTIONS:

Wipe clean with a soft, dry cloth.

Do not use polishes or cleaners on the fixture, as they will damage the finish.