

# baby&child

## RESTORATION HARDWARE


Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. The item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

### PARTS ENCLOSED:

- (A) Plastic wire connector (2)
- (B) Mounting plate (1)
- (C) Mounting screw (2)
- (D) Metal plate (1)
- (E) Shade (1)
- (F) Screw (4)
- (G) Bulb (2)
- (H) Green ground screw (1)
- (I) Screw (2)
- (J) Screw (3)
- (K) Shade holder (1)
- (L) Screw cap (2)

## MARINERS FLUSHMOUNT

### Direct Wire Installation

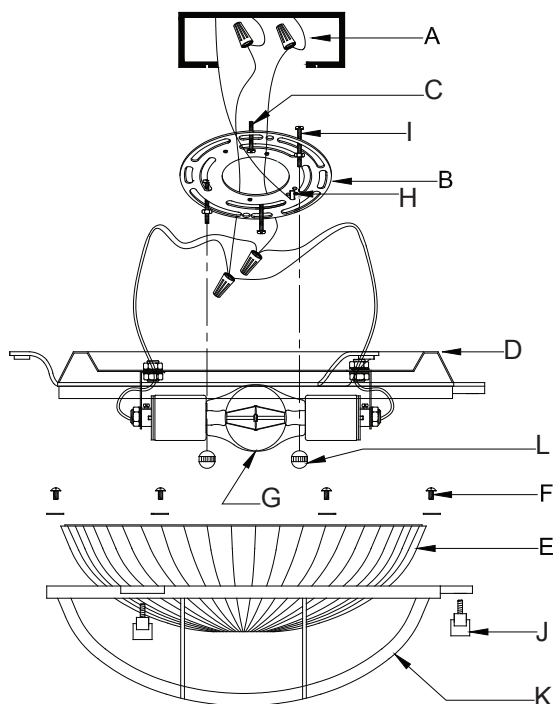

### IMPORTANT SAFETY INSTRUCTIONS:

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (2) 40-watt maximum TYPE A bulbs.  
To avoid the risk of fire, do not exceed the recommended wattage.

### WARNINGS:

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your pendant is fully assembled.

To reduce the risk of fire, electrical shock, or personal injury, always turn off pendant and allow it to cool prior to replacing light bulbs.  
Do not touch bulb when fixture is turned on or look directly at lit bulbs.  
Keep flammable materials away from lit bulbs.

**THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE**

### TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the pendant will be installed.
3. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (A) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a plastic wire connector (A) and wrap the connection with electrical tape.
4. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green or bare wire). Or wrap the ground wire around the green ground screw (H).
5. Attach the mounting plate (B) to the outlet box using the Mounting screws (C) and tighten.
6. Attach the metal plate (D) to the Mounting plate (B) using the screw (I) and screw cap (L) falling off base.
7. Insert (2) MAX 40W Type A bulbs (G) into the Sockets.
8. Attach the shade (E) to the Shade Holder (K) using screws (F) and (J) to secure.
9. Attach the Shade Holder (K) to the Metal Plate (D) using screws (J).
10. Restore power to the junction box and test fixture.
11. Installation is complete.

### CARE INSTRUCTIONS:

Do not use polishes or cleaners on your lamp.

JUST WIPE CLEAN WITH SOFT CLOTH.