

# baby&child

RESTORATION HARDWARE

Thank you for selecting Restoration Hardware Baby & Child lighting. Our assortment is crafted with the highest quality materials that coordinate perfectly with our Baby & Child bedding collections, making it easy to create an elegant nursery or child's bedroom. Each item's surface is sealed, which eliminates the need for polishing and ensures a lasting finish for years to come.

**PARTS ENCLOSED:**

- (A) Mounting Plate (1)
- (B) Wire Connector (3)
- (C) Green Ground Wire Screw (1)
- (D) Mounting Plate Screw (2)
- (E) Back Plate (1)
- (F) Plate Screw (2)
- (G) Bulb (1)
- (H) Socket Sleeve (1)
- (I) Socket (1)

**IMPORTANT SAFETY INSTRUCTIONS:**

WE RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

This fixture has been rated for up to (1) 40W-max Type B bulb. To avoid the risk of fire, do not exceed the recommended wattage.

**WARNINGS:**

All wires are connected. When unpacking, be careful not to pull wires as a bad connection may result. Do not connect electricity until your sconce is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off sconce and allow it to cool prior to replacing light bulbs. Do not touch bulb when fixture is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.


**MANOR COURT CRYSTAL SCONCE**

**Direct Installation**

THIS IS NOT A TOY AND THE PRODUCT HAS NO PLAY VALUE.

**TO ASSEMBLE:**

1. Carefully remove all parts from the box and remove all plastic covering.
2. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX / CIRCUIT BREAKER.
3. Guide the wiring from the outlet box through center hole in the mounting plate (A).
4. Attach the mounting plate (A) to the outlet box using the mounting plate screws (D) to secure.
5. Attach the ground wire (usually green or bare wire) from the fixture to the ground junction box wire from the outlet box (usually green or bare wire). Or wrap the ground wire around the green ground wire screw (C).
6. Connect the hot wire to the hot junction box wire (usually black) with a wire connector (B) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white) with a plastic wire connector (B) and wrap the connection with electrical tape.
7. Attach the back plate (E) to the mounting plate (A) and use the plate screw (F) to secure the back plate.
8. Place the socket sleeve (H) onto the socket (I).
9. Insert (1) 40W-max Type B bulb (G) into the threaded sockets (I).
10. Restore power to the junction box and test lamp fixture.
11. Installation is complete.

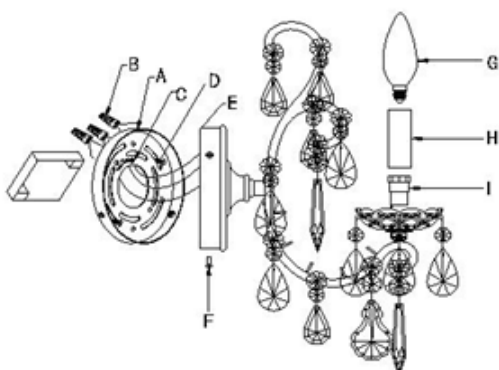

**CARE INSTRUCTIONS:**

To clean, use a soft cloth only. Do not use polishes or cleaners on your lamp.